

RF-CATCHER STARTER KIT


The Most Compact RF Capture & Playback device!

COVERING A FREQUENCY RANGE FROM 70 MHz UP TO 6 GHz, **RF-CATCHER** CAN RECORD AND PLAY REAL-TIME RF BANDWIDTH UP TO 55 MHz.

RF-Catcher allows experimentation of a wide range of signals including Radio (FM, DAB...), TV broadcast (DVB-T/T2, C/C2, ISDB-T, etc...), cellular, Wi-Fi, up to satellite signals (DVB-S/S2).

The RF-Catcher is equipped with LNB control for frequency down conversion of Ku/C bands. The integrated GNSS receiver provides precise location information; KML file, metadata, NMEA compatible.

The RF-Catcher is compact, robust, lightweight (600g) and cost-effective: your technicians and engineers can bring it everywhere in their hand bag.

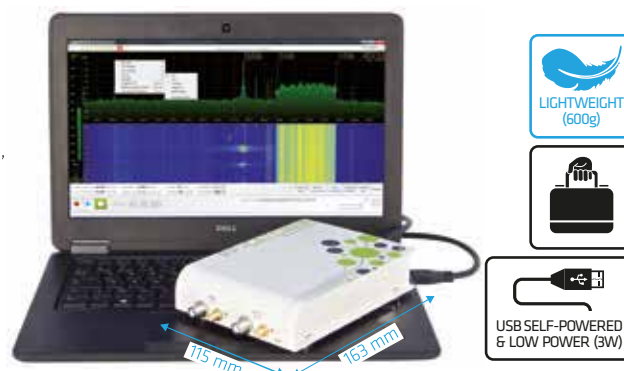

Easy to use & Responsive GUI

High degree of parameterization for measures

RSSI (Received Signal Strength Indication)

FFT display for live RF reception/playback

- Spectrum measurements
- Averaging functions
- FFT windows functions

IQ max power

IQ average power

Status indicators

- USB: connection (USB2 or USB3)
- LOSS: IQ sample loss
- IBS: in band saturation (ADC)
- OOBS: out of band saturation (LNA)

Frequency setting for capture (Rx) / playback (Tx)
range 70 MHz to 6 GHz
1 kHz resolution

RF Capture & Playback controls

Sample rate
up to 61.44 Msps

Variable acquisition **bandwidth FROM 1 up to 55 MHz**

Gain setting for capture
Attenuation setting for playback

AGC (Automatic Gain Control) for RF reception

Rx/Tx connector
setting: **F or SMA**

RF capture file stored on
PC: 170 min of 12 Msps
bandwidth record = 512GB
**NONPROPRIETARY
IQ FILE FORMAT**

FFT resolution
bandwidth:
30 Hz (for 2 MHz) to
210 kHz (for 55 MHz)

**WATERFALL
SECTION**

**Allows detection of
bursts & transients
(Wi-Fi, 4G, ...)**

Rolling Buffer mode
for RF capture

LNB configuration
for Satellite capture

Trigger mode
for synchronized
capture/playback
between several
devices

Auto-test control:
evaluate the PC
performance for RF
capture/playback
max bandwidth

APPLICATIONS

- Chipset, STB/TV field test debugging (a great tool to support your pre-sales team)
- Easy & simple usage: no need for **RF experts** to capture field RF signals (ex: DAB/FM, TV broadcast, Satellite broadcast, Wi-Fi,...), **your sales force can do it for you anywhere in the world**
- **Handy demonstration setup:** bring real RF sources into your laptop
- RF sources stored on a PC: easy to duplicate/transfer between head-quarter and regional sites
- Radio/TV Broadcast/Telecom RF troubleshooting
- **Test automation** (command line tools)
- Telecommunications Regulation Agencies validation tool

RX MODE

| | |
|--|---|
| Frequency | |
| Frequency band | 70 MHz to 6.0 GHz |
| Frequency resolution | 1 kHz |
| Real-time bandwidth | 1 MHz to 55 MHz |
| RBW (Resolution bandwidth) | 30 Hz (for 2 MHz) to 210 kHz (for 55 MHz) |
| Noise Figure | |
| | < 8 dB |
| Phase Noise at 10 kHz | |
| 1200 MHz | -91.3 dBc/Hz |
| 3200 MHz | -85.2 dBc/Hz |
| 5000 MHz | -82 dBc/Hz |
| Noise Floor / Sensitivity | |
| | -110 dBm |
| IF Band | |
| ADC resolution | 12-bit |
| Sampling rate | 61.44 Msps max |
| RF Input Characteristics | |
| Input Dynamic Range | -110 to 0 dBm |
| Input Level Resolution | 1 dB |
| Max Peak power* | 0 dBm |
| Max DC input* | ± 15 V |
| <small>*Absolute maximum ratings</small> | |
| Gain Range (1dB step) | |
| 800 MHz | 0 to 74 dB |
| 2300 MHz | 0 to 73 dB |
| 5500 MHz | 0 to 65 dB |
| IIP3 | |
| 1200 MHz | 7.2 dBm |
| 3200 MHz | 8.4 dBm |
| 5000 MHz | 15.2 dBm |
| Storage | |
| 512 GB @ 12 Msps | 170 min |
| 512 GB @ 24 Msps | 85 min |
| 512 GB @ 40 Msps | 50 min |



TECHNICAL CHARACTERISTICS

| |
|--|
| 2x RF inputs, 2x RF outputs for RF Capture & Playback (SMA/F connectors)* |
| Frequency range from 70 MHz up to 6 GHz , resolution 1kHz |
| Variable bandwidth from 1 up to 55 MHz |
| Automatic filtering: harmonic suppression for playback, out of band signal suppression for capture |
| RF reception: <ul style="list-style-type: none"> Status indicators: USB connection / IQ sample loss / In band saturation (ADC) / Out of band saturation (LNA) FFT display: Spectrum measurements: FFT resolution, FFT markers insertion / Averaging functions: RMS, min/max hold / FFT window functions: rectangular, Hamming, Blackman, Hann... Signal waterfall plot (three-dimensional spectra) Power in band measurement |
| Trigger mode for synchronized capture/playback between several devices |
| RF capture: variable gain, automatic gain setting (AGC), rolling buffer mode |
| RF playback: variable attenuation |
| Lightweight and compact 163 x 115 x 32 mm, 600 g, 3 W typical power consumption |
| Connected to PC via USB3.0 connectivity (SuperSpeed) (USB2 backward compatible, but with lower performances due to limited USB2 bitrate) |
| IQ files stored on the PC: 12 Msps sample rate, 170 min of record = 512GB |
| Nonproprietary IQ file format , compatible by Matlab software |
| Integrated GNSS (GPS, Glonass) receiver: KML file, metadata, NMEA protocol |
| Compatible MS Windows 7/8/8.1/10 (x64 versions only) |

*Both input/output connectors cannot be used at the same time

TX MODE

| | |
|----------------------------------|-------------------|
| Frequency | |
| Frequency band | 70 MHz to 6.0 GHz |
| Frequency resolution | 1 kHz |
| Real-time bandwidth | 1 MHz to 55 MHz |
| Phase Noise at 10 kHz | |
| 1200 MHz | -91.3 dBc/Hz |
| 3200 MHz | -85.2 dBc/Hz |
| 5000 MHz | -82 dBc/Hz |
| RF Output Characteristics | |
| Attenuation range | 0 to 89 dB |
| Amplitude resolution | 0.01 dB |
| Power output | 5 dBm max |
| Max DC output | ± 15 V |

PHYSICAL

| | |
|--------------------------|---|
| Dimensions | 163 x 115 x 27 mm 6.4 x 4.5 x 1.2 in |
| Weight | 600 g |
| Power supply | USB self-powered |
| Auxiliary power | USB connector (additional power supply for satellite captures using LNB controller) |
| Power consumption | 3W |

ENVIRONMENT

| | |
|------------------------------|----------------|
| Operating temperature | -20°C to +55°C |
| Storage temperature | -20°C to +70°C |

INTERFACES

| | |
|---------------------------|--|
| RF input | 1x SMA-type female - 50 Ω 1x F-type female - 75 Ω (up to 2 GHz) |
| RF output | 1x SMA-type female - 50 Ω 1x F-type female - 75 Ω (up to 2 GHz) |
| 1PPS/Trigger input | 1x SMA-type female - 50 Ω |
| Trigger output | 1x SMA-type female - 50 Ω |
| 10MHz | 1x SMA-type female - 50 Ω |
| GPS | 1x SMA-type female - 50 Ω |
| Power & Data | 1x USB3 B-Type |
| Auxiliary power | 1x USB3 B-Type |

PC MINIMUM REQUIREMENTS

| | |
|-----------------------------|---|
| Core i5/i7 processor | USB 3.0 connectors |
| 4 GB of RAM | SSD for storage (Solid State Drive) |

ORDERING CODE

RF-Catcher Starter Kit **RF Capture & Playback**
Shipped bundled with HW device and software application for MS Windows 7/8/8.1/10 (x64)

sales@test-tree.com

www.test-tree.com