

# EDGEPROBE NANO

DVB-C/C2



**EDGEPROBE NANO DVB-C/C2 IS A TINY DIGITAL CABLE STANDALONE ANALYZER, WITH NO COMPROMISE ON QUALITY, USED FOR CONTINUOUS MONITORING OF CRITICAL RF, MPEG-2 TS OR C2 FRAME PARAMETERS AND HEALTH DIAGNOSIS OF CABLE NETWORKS.**

The probe is able to continuously log all measurement values in report files and to send **SNMP** traps in real-time if selected parameters' values exceed defined thresholds, thus achieving the optimal trade-off between alarm severity and alarm management time. For troubleshooting, a **Web GUI** allows **remote access** to all monitored parameters from RF to baseband.

For maximum cost-efficiency, EdgeProbe Nano DVB-C/C2 is capable of monitoring multiple channels on a **round-robin** basis. One single unit can be installed at a specific location to monitor the complete set of multiplexes operated. With its small, compact and easy to handle design, the EdgeProbe Nano DVB-C/C2 is the ideal tool for field technicians to transport in order to validate and **monitor 24/7** all points of a Digital Cable network.

EdgeProbe Nano DVB-C/C2 provides monitoring of the signal at different levels:

- **RF transmission:** measures key RF signal parameters and indicates the modulation parameters.
- **MPEG-2 TS:** checks the ETSI TR 101 290 (Priority 1, 2 & 3) conformance and provides optional Quality of Service indicators (Service Availability, Service Degradation).

The **Service Plan** provides the means to check the **description of your multiplexes**. With its **ASI and IP outputs**, it can also be used to forward the entire multiplex for QoS monitoring.

The **Extended Memory** option enables the probe to continuously record the logs and all measurement values on an external SD card. In addition, the MPEG-2 TS live stream can also be recorded.

## APPLICATIONS


- Digital Cable network monitoring (24/7)
- Multi-channel monitoring in round-robin mode
- Generation of Service Availability reports for Service Level Agreement
- Rebroadcasting receiver: RF to ASI or IP

## BENEFITS

- **Small, Silent & Magnetized:** can be installed anywhere
- Easy to use and configure
- Remote & real-time monitoring of the health of your CATV network
- Digital Cable live signals reception and ASI/IP forwarding
- Validation of reception & transmission quality
- Compatible with low bandwidth management network (e.g. GPRS)

## CHARACTERISTICS

DVB-C/DVB-C2 full support
ITU-J83 Annexes A, C (roll-off 0.15) supported
1x RF in, 1x ASI out, 1x IP Control/Data in/out (VLAN support)
RF key parameters accurate measurements
Outstanding selectivity
Multiplex description & Service Plan check
ETSI TR 101 290 Level 1, 2 and 3 + QoS validation
MPEG-2 TS over ASI out or IP forward for video QoS monitoring
Automated & Secure Deployment for small to large networks
Standalone unit, SNMP compatible, 8W power consumption

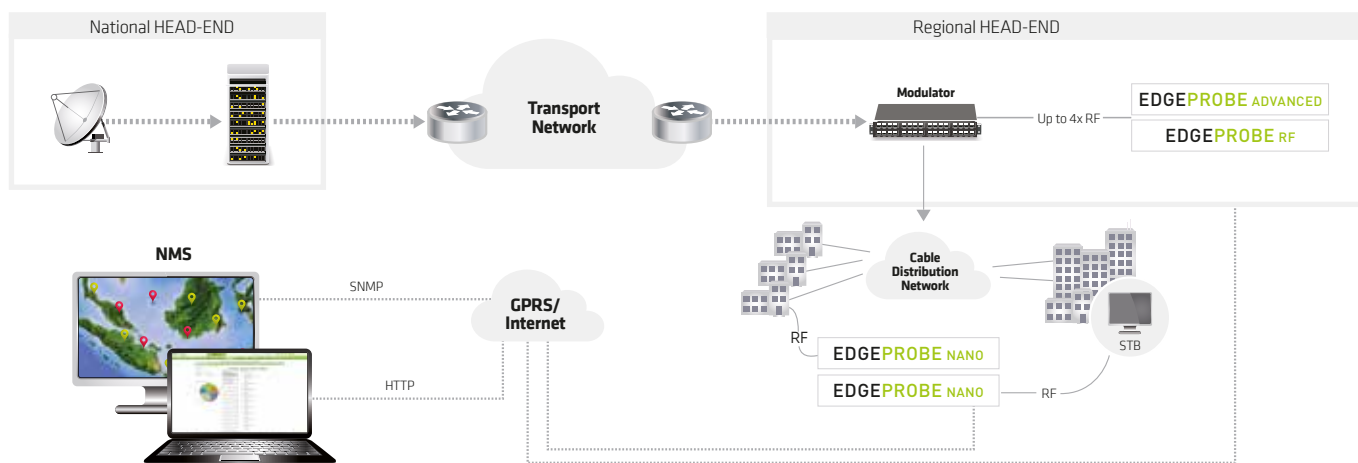



**INTERFACES**

<b>Control/Data</b>	1x Gigabit Ethernet for Web GUI, SNMP-V2C and IP Data in/out (VLAN support)
<b>RF</b>	1x RF input (F-type female - 75 Ω)
Standard	DVB-C, DVB-C2
Frequency range	40 to 1000 MHz
Sensitivity	-80 to -5 dBm
Channel bandwidth	6 & 8 MHz
Symbol rate	1.8 to 7.2 Msymbols/s
Modulation	16QAM, 64QAM, 128QAM, 256QAM, 1024QAM, 4096QAM
<b>MPEG-2 TS</b>	1x ASI output (BNC-type female - 75 Ω)

**MONITORING FEATURES**

<b>RF Monitor</b>	Demodulation status: Lock / Unlock Signal level: -90 to -5 dBm MER: 0 to 40 dB BER (DVB-C): Viterbi, RS BER (DVB-C2): LDPC, BCH Modulation parameters: L1 part2 signaling in DVB-C2
<b>TS Monitor Base</b>	ETSI TR 101 290 Priority 1 and 2
<b>TS Monitor Advanced</b>	ETSI TR 101 290 Priority 3
<b>QoS Monitor</b>	SAE (Service Availability Error) SDE (Service Degradation Error)
<b>Service Plan</b>	Verify regional services Service & PID bitrates, Scrambling, Service & PID presence
<b>Scanning</b>	Monitor sequentially multiple channel frequencies over 1 RF input
<b>Extended Memory</b>	32 GB of internal storage for: · Event logs up to 6 months · Trends up to 6 months · TS recording



DVB-C RF Channel monitoring view



Service Plan monitoring view



**PHYSICAL**

Height: 30 mm / 1.2 in, Width: 144 mm / 5.6 in, Depth: 137 mm / 5.3 in  
Power supply: 12 VDC, 100-240 VAC to 12 VDC adapter provided  
**Power consumption: 8W**

**ENVIRONMENT**

Operating temperature: -20 to 55°C / -4 to 131 °F  
Storage temperature: -20°C to 70°C / -4°F to 158°F  
Humidity: 0 to 95%, non condensing

**ORDERING CODES**

EdgeProbe Nano	DVB-C/C2 Nano Monitoring Probe
Included	<b>RF to ASI, RF to IP, RF monitoring, VLAN</b>
SW options	<b>Scanning</b> Multiple RF channels sequential monitoring <b>TS Monitor Base</b> ETR290 Priority 1, 2 monitoring <b>TS Monitor Advanced</b> ETR290 Priority 3 monitoring <b>QoS Monitor</b> SAE, SDE monitoring <b>Service Plan</b> Multiplex Service/PID monitoring <b>Extended Memory</b> 32 GB storage: trends, logs, TS record